

**ONE LIFE.
PROTECT IT.**



AIR XKD

DATA SHEET

**GRP I · ATEX, MASC
+ IECEx**

MAIN FEATURES

- Real-time, continuous measurement of atmospheric dust concentration
- High-reliability, low-maintenance for high dust environments
- High capacity OPC
- Industry standard sizing PM1.0, PM2.5, PM4.25 and PM10
- Low-end resolution measuring down to 0.35 µm with 99.9% capture
- Ability to display TSP measurement reading
- Quantification of particle size categories to customer requirements (custom sizing)
- Operational stability in varying environment and atmospheric conditions
- On-device display readout
- Choice of display modes: 'Live' readout or configurable 'Averages'
- 2 x configurable relay output contacts for remote alarms and control functions
- 2 x 4 mA to 20 mA analogue output signals of measured averages
- Remote RS485 MODBUS RTU Serial I/O interface
- Ethernet MODBUS TCP/IP output
- High visibility warning indicators
- 'Plug and play' installation

PRODUCT OVERVIEW

The TX8005 **AIR XD Dust Monitor** is designed to provide detailed, accurate, real-time data on airborne particulates so that users can take appropriate actions to stay safe and ensure personnel are fully protected from particulate-related health hazards.

The **AIR XD** allows users to simultaneously monitor multiple particulate matter (PM) sizes (PM1.0, PM2.5, PM4.25, PM10, as well as custom sizes) and can report on Total Suspended Particulates (TSP).

Precise data is collected for measurable particulates, enabling detailed size profiling and analysis using the application software.


The **AIR XD** uses an innovative Optical Particle Counter (OPC) that combines adaptive particle flowrate with advanced sensing technology to ensure a high level of measurement accuracy. The size of each particle is instantaneously measured and classified at up to 10,000 samples per second to allow detailed real-time reporting in high dust environments.

As the **AIR XD** records data on all particulates between 0.35 μm and +40 μm , users can easily access and view detailed information about a wide range of PM sizes.

Measurement information can be viewed via the instrument display or as live or historical readings using the **Breathe** application software.




PRODUCT DIMENSIONS

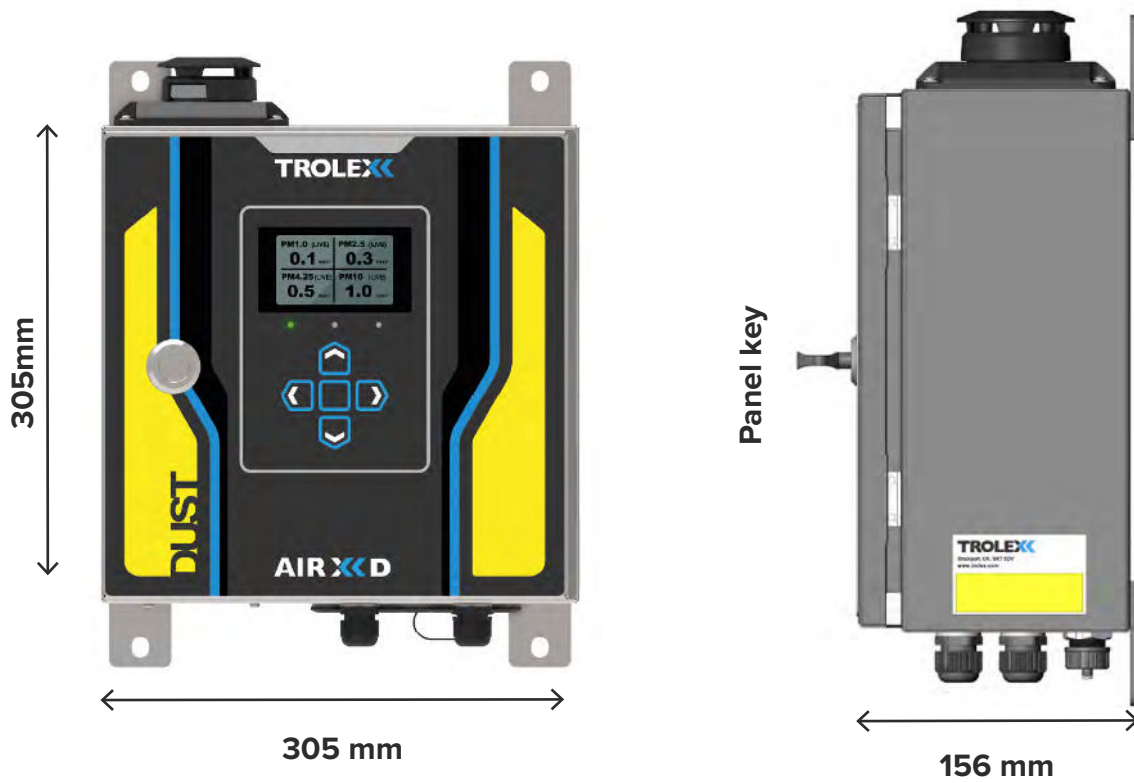

PRODUCT MOUNTING

Ensure the **AIR XD** is mounted vertically during installation.

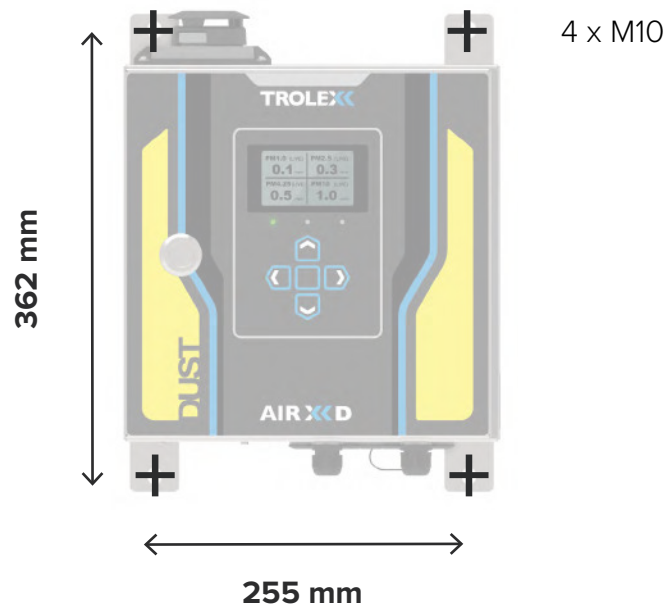

PARTICULATE SENSING PARAMETERS

PM size range	PM1.0, PM2.5, PM4.25, PM10 + TSP
TSP range	Up to +40 μm displayed in mg/m^3 or $\mu\text{g}/\text{m}^3$
Extended range	TSP indicative up to 150 μg displayed in mg/m^3 or $\mu\text{g}/\text{m}^3$ 150 mg/m^3
PM measurement range	0.35 μm to +40 μm over 24 bins
PM measurement capability*	Up to 1,500 mg/m^3
PM continuous operating range**	Up to 25 mg/m^3
PM density	0.8 g/ml to +8.0 g/ml (default: 1.65 g/ml)
PM measurement units	mg/m^3 or $\mu\text{g}/\text{m}^3$
Averaging period	1 second to 24 hours
Averaging channels	2 x configurable (default: 15 min + 8 hours)
Sampling interval	1 second
Particle count	Up to 10,000 (particles/second)
Flow rate	Dynamic (1.2 l.min nominal)
Total flow rate	5.5 l/min (typical)
Accuracy	$\pm 5\%$

*The instrument can define particulate measurement peak trends up to the quantity specified.

**During sustained high dust loading periods, the instrument will report on PM data up to the quantity specified.

Note: Sustained exposure to PM quantities above 25 mg/m^3 will be logged; however, this may affect the operating life of the OPC.

TECHNICAL SPECIFICATION

Ambient temperature limits	-10 °C to +45 °C
Humidity	0 to 95% RH (non-condensing)
Protection classification	Main enclosure, dust and waterproof: IP66 Particulate flow path (cap open): IP22 Particulate flow path (cap closed): IPX6
Housing material	Polymer coated stainless steel
Weight	8.2 kg
Cable entries	5 x M20 with removable blanks 1 x M20 USB connector 1 x M20 USB connector (where specified)
Nominal power	12 V, 500 mA
Supply current	9.8 V (max. peak supply input) 660 mA nominal (max. peak supply current)
Power consumption	6 W
Inrush current	350 mA peak
Relay outputs	2 x configurable (alarm outputs) Dry contact Maximum rating 36 V ac/dc 300 mA (internal overcurrent and overvoltage protection fitted)
4 mA to 20 mA outputs	2 x configurable (real time or average readings) R1 and R2 with adjustable setpoints Maximum attached load: 280 Ω
Communications	RS485 data output with MODBUS RTU protocol Ethernet (MODBUS TCP/IP)
Data download	External USB interface
Instrument data storage	8 GB > 10 years (log rate dependent) Stored device data can be cleared as required
User interface	128 x 64 dot matrix display with RGB backlight
Visual alarms	Display RGB backlight
Indicators	1 x green high brightness LED – sensor heartbeat 1 x blue high brightness LED – communications

ELECTRICAL CONNECTIONS



V+	0V	\perp
1	2	3

DC Power Input



Power In		Relay Connections			RS485 Communication			
1	Supply voltage	4	Relay A: Normally Closed	10	RS485 0V			
2	0V return	5	Relay A: Common	11	RS485 B			
3	Earth	6	Relay A: Normally Open	12	RS485 A			
		7	Relay B: Normally Closed	13	RS485 B			
		8	Relay B: Common	14	RS485 A			
		9	Relay B: Normally Open	15	RS485 0V			


Table 1: Power, Relay and RS485 terminal connections

The pin connections listed in Table 2 for the Ethernet connector are not labelled in the figure but relate to the internal connections of the RJ45 connector with Pin 1 on the left up to Pin 8 on the right. The switches shown either side of the RS485 terminals in the figure allow setting of half duplex or full duplex mode.


Ethernet	4 to 20mA – Ch2 and Ch1	
Pin 1: TX+	16	+ out
Pin 2: TX-	17	0V return
Pin 3: RX+	18	0V return
Pin 4: No connection	19	+ out
Pin 5: No connection		
Pin 6: RX-		
Pin 7: No connection		
Pin 8: No connection		

Table 2: Ethernet and 4 to 20mA connections

CERTIFICATION AND CONFORMITY

	<p>IECEx (International) certification for use in underground mines in Australia (including Queensland) and New Zealand.</p>
	<p>Standards: IEC 60079-0:2017 Edition 7.0 IEC 60079-11:2011 Edition 6.0 IEC 60079-28:2015 Edition 2.0</p>

	<p>ATEX certification for use in underground mines in European Union.</p> <p>Complies with the following EU Directives:</p> <p>ATEX Directive 2014/34/EU - EN IEC 60079-0:2018 - EN 60079-11:2012 - EN 60079-28:2015</p> <p>EMC Directive 2014/30/EU - EN 61326-1:2013 - EN 61000-6-2:2019 - EN 61000-6-3:2007+A1:2011</p> <p>RoHS Directive 2011/65/EU</p>
--	---

	<p>MASC (IA) certification for use in underground mines in South Africa.</p>
	<p>Standards: SANS (IEC) 60079-0:2019 SANS (IEC) 60079-11:2012 SANS (IEC) 60079-28:2016</p>

6.1 Underground Mines

Equipment / Product Code	Ex Certificate Number	Ex Certification Code
Air XD TX8005.06(.XX...)	IECEx ExTC 19.0014X	Ex ia op is I Ma Ta =-20 °C to +50 °C
Air XD USB Drive TX8805.06(.XX...)		Ex ia I Ma Ta =-20 °C to +50 °C

Equipment / Product Code	Ex Certificate Number	Ex Certification Code
--------------------------	-----------------------	-----------------------

Air XD TX8005.19(.XX...)	IECEX ExTC 19.0014X TÜV 19 ATEX 8468 X	I M1 Ex ia op is I Ma Ta =-20 °C to +50 °C
Air XD USB Drive TX8805.19(.XX...)		I M1 Ex ia I Ma Ta =-20 °C to +50 °C


Equipment / Product Code	Ex Certificate Number	Ex Certification Code
Air XD TX8005.05(.XX...)	MASC M/20-8449X IECEX ExTC 19.0014X	Ex ia op is I Ma Ta =-20 °C to +50 °C
Air XD USB Drive TX8805.05(.XX...)		Ex ia I Ma Ta =-20 °C to +50 °C

The following Special Conditions of Safe Use and Specific Conditions of Use apply to the above ATEX and IECEX Certificates.

The equipment has the following parameters which shall be observed when connecting in an intrinsically safe circuit:

	Connector P1 Supply to TX8005	Connector P7 Relay contacts – Relay A and Relay B	Connector P5 RS485 - All lines combined	Connector P4 (Ethernet) – All lines combined	Connector P9 4-20 mA – CH2, CH1 - Separate channels
Terminal no.	1 wrt 2	4, 5, 6 and 7, 8, 9	11, 13 or 12, 14 wrt 10 and 15		16, 17 and 18, 19
Ui	16 V	16 V	8.4 V	17.64 V	16 V
Ii	3.28 A				132 mA
Pi					273 mW
Ci	0 µF	0 µF	0 µF	0.48 µF	Negligible
Li	0 µH	0 µH	0 µH	0 µH	Negligible
Uo		0 V	5.88 V	0 V dc	15.75 V
Io		0 A	127 mA	0 A dc	510 mA
Po			186 mW	0 W dc	2 W
Co			1000 µF	1000 µF	15.8 µF
Lo			28 mH	97 µH	1.7 mH
Lo/Ro				145 µH/	230 µH/

Refer below for example terminal number identification for external connection:

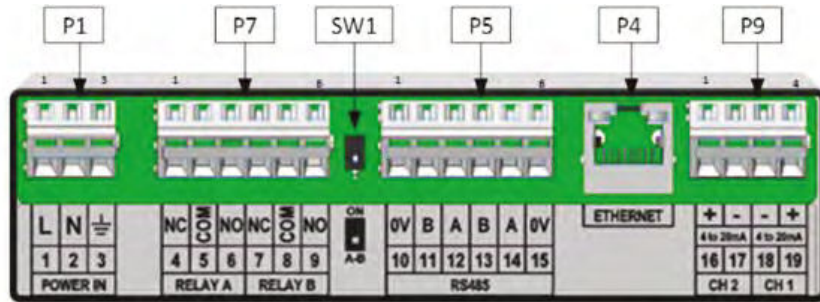

The USB connector on the base of the equipment shall only be connected to the Trolex TX8805 Air XD USB Drive in the hazardous area.

USB drives with no power source (e.g. standard USB stick) may be connected to the USB connector in the safe area for test purposes etc.

The TX8005 must be earthed at pin 3 of the POWER IN connector (P1) to prevent excess static charge accumulation.

ORDER REFERENCE

Option	Description
TX8005.00.03.01.01.00	GP AC/DC
TX8005.05.02.01.01	MASC Grp I
TX8005.06.02.01.01	IECEEx Grp I
TX8005.19.02.01.01	ATEX Grp I
EXTWARRANTY2	2-year Extended warranty · 3 years total
P5628.5000	Transportable Pack · Tripod, Mounting Plate + TX6650 Battery Pack
P5628.4000	Compliance Pack+ · 4 x Samples, 4 x Applicators, 1 x Hood
P5644.4004	Sample Replacement Kit · 12 x Samples + 12 x Applicators
P5644.4004	Sample Replacement Kit · 12 x Samples + 12 x Applicators
P5628.800.001	Breathe Software License Online · Annual license per device
P5642.5000	Spare Battery for Transportable Pack
P5625.19.01	Replacement display
P5628.100.02	Grp I Duct with Sensor

DISPOSAL

Waste of Electrical and Electronic Equipment (WEEE) Directive (2012/19/EU)

The **AIR XD** operates a protective thermal cut-out sequence when the temperature inside the instrument exceeds the maximum operating temperature specification, detailed in **section 7**. This protective measure is in place to maintain the lifespan and operating functionality of the optical sensor assembly when the **AIR XD** is installed in environments with high ambient temperatures.



This symbol, if marked on the product or its packaging, indicates that this product must not be disposed of with general household waste.

In the European Union and many other countries, separate collection systems have been set up to handle the recycling of electrical and electronic waste.

At the end of the product's life, do not dispose of any electronic sensor, component or instrument in the domestic waste. Contact Trolex or the distributor for disposal instructions.

DISCLAIMER

The information provided in this document contains general descriptions and technical characteristics of the performance of the product. It is not intended as a substitute for and is not to be used for determining suitability or reliability of this product for specific user applications. It is the duty of any user or installer to perform the appropriate and complete risk assessment, evaluation and testing of the products with respect to the specific application or use. Trolex shall not be responsible or liable for misuse of the information contained herein. When instruments are used for applications with technical safety requirements, the relevant instructions must be followed.

All pertinent state, regional, and local safety regulations must be observed when installing and using this instrument. For reasons of safety and to help ensure compliance with documented system data, only Trolex or its affiliates should perform repairs to components.

Trolex Ltd. reserves the right to revise and update this documentation from time to time without obligation to provide notification of such revision or change. Revised documentation may be obtainable from Trolex.

Trolex Ltd. reserves the right, without notice, to make changes in equipment design or performance as progress in engineering, manufacturing or technology may warrant.

TRADEMARK

© 2026 Trolex® Ltd.

No part of this document may be reproduced in any form or by any means, electronic or mechanical, including photocopying, without express written permission of Trolex.

Trolex is a registered trademark of Trolex Ltd. The use of all trademarks in this document is acknowledged.

At Trolex, we save lives.

We believe that no person should risk their life to earn a living.

Our aim is to become the world's leading name in health and safety technology, through pioneering products that provide real-world benefits to our customers, whenever workers operate in hazardous environments.

For more information about Trolex, please contact us at:

Website
trolex.com

Enquiries
sales@trolex.com

Telephone
+44 (0) 161 483 1435

Trolex Ltd
Newby Road, Hazel Grove
Stockport, Cheshire
SK7 5DY, United Kingdom

 /company/trolexUK

 trolexUK

 /trolexUK

 /TrolexUK